

## MOBOTIX T25 6MP Hemispheric Camera

MOBOTIX!  
Access Control included

Communication via Internet, 3G/4G

180°

Hemispheric video: 180° wall-to-wall capture, no blind spots.

IK09

Weatherproof

IP Video Door Station in triple frame  
with BellRFID and Info Module

Technical specifications subject to change without notice

### The World's Most Advanced Door Station.

This modular IP Video Door Station, a one-of-its-kind, offers a combination of 6MP Hemispheric technology and integrated VoIP/SIP to provide full access control and a two-way video communication option – at home or via a mobile app while on the go.

**Technical specifications subject to change without notice.** For more information on the T25 and on the entire range of MOBOTIX products, such as prices, manuals, video management software for computers and iOS devices, etc., please go to [www.mobotix.com](http://www.mobotix.com) > **Products**. Or contact us by phone (+49 06302 9816-103) or email ([sales@mobotix.com](mailto:sales@mobotix.com)).



## Hemispheric Video

Capturing a super-wide 180° field of view, the T25 camera module captures everything wall-to-wall for secure viewing and recording. The Hemispheric image correction is handled by the camera, no external PC required. The in-camera image correction saves bandwidth by up to 70 %.



## Instant 2-Way Communication – From Anywhere!

SIP/VoIP built-in for instant 2-way intercom communication. If the bell button is pressed, the camera records and a phone call or message can be sent directly to your PC, mobile or phone. A conversation can be initiated with the visitor, from wherever you are in the world.



## Secure Access With RFID And Messaging

With the door station modules, keyless RFID and PIN access can be added to ensure secure door entry at all times. Visitors can leave voicemails and message retrieval is done instantly locally or remotely.

Technical Data			
<b>Lens Options</b>	B016 (L10)	<b>Min. Light Sensitivity</b>	Day Sensor: 0.1 lux at 1/60 sec Night Sensor: 0.02 lux at 1/60 sec
<b>Image Sensors</b>	1/1.8" CMOS (6MP) Day (Color) or Night (B&W)	<b>Sensor Resolution</b>	6MP: 3072x2048 pixels (Color/B&W)
<b>Max. Frame Rate (MxPEG)</b>	MEGA/HD: 30 fps, QXGA: 15 fps, 6MP: 8 fps	<b>Compression</b>	MxPEG, M-JPEG, JPEG, H.264 (SIP video only)
<b>DVR Recording</b>	Internal: microSD Card External: PC/NAS (to 4 TB)	<b>Audio</b>	Integrated microphone & speaker, VoIP, intercom, sound recording
<b>Operating Conditions</b>	IP65, IK09, -30 to +50 °C	<b>Internal Sensors</b>	Temperature, microphone, illumination, shock detector.
<b>Image Processing</b>	MxActivitySensor, VMD, image correction, backlight, MxAnalytics	<b>Software (free of charge)</b>	MxManagementCenter, MOBOTIX App



# T25 – Technical Specifications

Security-Vision-Systems **MOBOTIX**



Camera Variants	T25 Day	T25 Night
<b>Lenses, Sensors</b>		
Fisheye Lens MX-B016 (Hemispheric, 180° x 180°)	MX-S15-D016 (white) MX-S15-D016-b (black) MX-S15-D016-s (silver) MX-S15-D016-d (dark gray) MX-S15-D016-a (amber)	MX-S15-N016 (white) MX-S15-N016-b (black) MX-S15-N016-s (silver) MX-S15-N016-d (dark gray) MX-S15-N016-a (amber)
Ultra Wide Lens MX-B036 (103° x 77°)	–	–
Super Wide Lens MX-B041 (90° x 67°)	–	–
Wide Lens MX-B061 (60° x 45°)	–	–
Standard Lens MX-B079 (45° x 34°)	–	–
Tele Lens MX-B119 (31° x 23°)	–	–
Distant Tele Lens MX-B237 (15° x 11°)	–	–
Super Tele Lens MX-B500 (8° x 6°)	–	–
CS-Varioobjektiv MX-B045-100-CS (39°-89° x 29°-65°)	–	–
Camera Module (body), lens can be ordered separately	–	–
Image sensor with individual exposure zones	Color	B/W
Sensor sensitivity in lux at 1/60 s / 1 s	0,1/0,005	0,02/0,001

Hardware Functions		
Protection class	IP65 and IK09	IP65 and IK09
Ambient temperature (range)	-30 to 50°C/-22 to 122°F	-30 to 50°C/-22 to 122°F
Temporary internal DVR	•	•
Internal DVR, ex works	4 GB (microSD)	4 GB (microSD)
Microphone/speaker	•/•	•/•
Passive infrared sensor (PIR)	With accessory (e.g., MxExtIO)	With accessory (e.g., MxExtIO)
Integrated temperature sensor	•	•
Shock detector	•	•
Power consumption (typical)	< 4,5 watts	< 4,5 watts
Variable PoE class (factory default: 3)	2 or 3	2 or 3
Interfaces Ethernet/MxBus/USB	•/•/•	•/•/•
Interfaces IO and RS232	With T25 accessory (e.g., MX-OPT-IO1)	With T25 accessory (e.g., MX-OPT-IO1)

Image Formats, Frame Rates, Image Storage		
Maximum image format (per sensor)	6MP (3072 x 2048)	6MP (3072 x 2048)
Maximum frame rate (MxPEG, max. resolution)	8 fps (6MP)	8 fps (6MP)
CIF images with 4 GB MicroSD DVR	250,000	250,000
VGA images with 4 GB MicroSD DVR	125,000	125,000
HD images with 4 GB MicroSD DVR	40,000	40,000
QXGA images with 4 GB MicroSD DVR	20,000	20,000



Camera Variants	T25 Day	T25 Night
<b>Allgemeine Funktionen</b>		
Door station functionalities	•	•
Digital zoom (continuous) with panning	•	•
Codecs: Motion-JPEG/MxPEG/H.264 for SIP	•/•/•	•/•/•
Programmable exposure zones	•	•
Snapshot recording (pre/post-alarm images)	50	50
Terabyte ring buffer storage (internal/network)	•	•
Continuous recording with sound (0.2 to 30 fps)	•	•
Event recording with sound, only with accessory (e.g., AudioMount)	•	•
Time and event control/flexible event logic	•/•	•/•
Weekly schedules/holidays	•	•
Web functionality (FTP, email)	•	•
Playback/QuadView and MultiView	•/•	•/•
Bidirectional sound in browser, only with accessory (e.g., AudioMount)	•	•
Logo generator, animated	•	•
Master/Slave arming	•	•
Several scheduled privacy zones	•	•
Customized voice messages, only with accessory (e.g., AudioMount)	•	•
VoIP telephony (audio/video, alert), only with accessory (e.g., AudioMount)	•	•
Remote alarm notification (network message)	•	•
Signal inputs/outputs and RS232 via MxBus module	•	•
Programming interface (HTTP API)	•	•
Security Features (HTTPS/SL, IP-based access control, IEEE 802.1X network authentication)	•	•
<b>Video Analysis</b>		
Video motion detector	•	•
MxAnalytics	•	•
MxActivitySensor (incl. behavioral detection)	•	•
<b>Video Management Software</b>		
MxManagementCenter/MxControlCenter/MxEasy	•/•/•	•/•/•
MOBOTIX App (iOS)	•	•

- available ex works
- not available



**Comparable RAL colors (not exactly the MX colors):**


White – RAL 9016, Silver Metallic – RAL 9006, Dark Gray – RAL 7012, Black – RAL 9005, Amber – RAL 8025



When **switching cameras** to the T25-6MP or S15M-6MP with an existing Door Station (T24, T25, S14 or S15 up to 5 MP), **continued use** of the remaining outdoor station modules is possible if the user performs a system reconfiguration. However, due to technical reasons, it is necessary to exchange an older existing T24-DoorMaster for the new **MX-DoorMaster** (article number: MX-Door2-INT-PW).



(T25 – Camera housing and connectors, excerpt from the technical documentation)

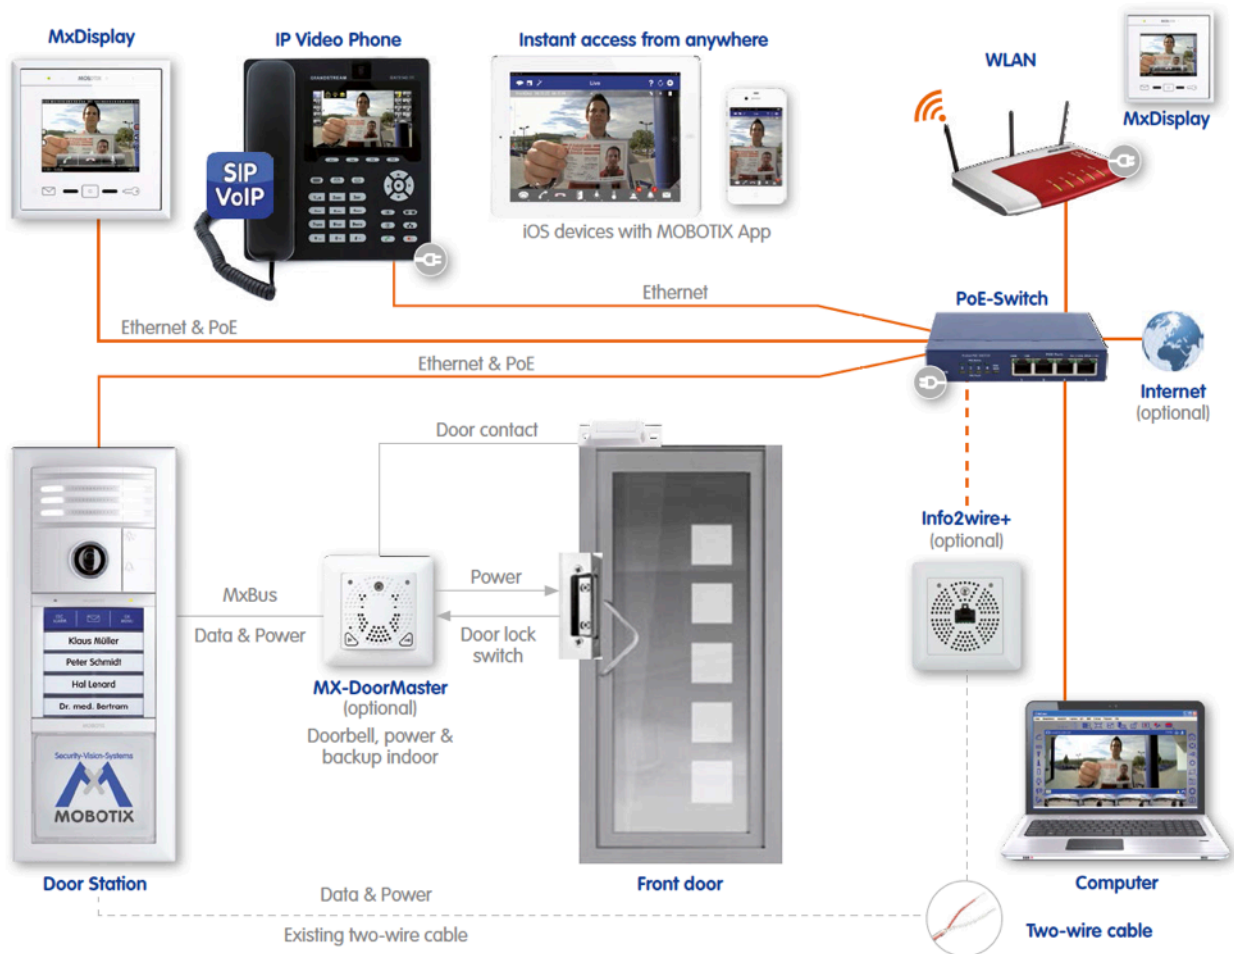

## Hemispheric IP Video Door Station – Fast, Cost-Effective Installation

Existing doorbells and intercoms can be replaced with a MOBOTIX Door Station, because it's an end-to-end solution that can be installed anywhere, even if there is no existing network infrastructure, using Mx2wire+. Any number of additional video and access devices can be integrated to create a door access control solution that can be controlled from any location.

The outdoor station requires just one cable for data and power to be connected to a PoE switch and thereby to any expandable Ethernet network. The T25 core module is also fitted with an internal MicroSD storage for convenient on-board storage, or alternatively can record to networked storage (NAS or PC).



## Ordering Information T25 Set 1 – 6MP (Cam Core + Keypad + Info Module):

MX Order Number	EAN	Description
<b>MX-T25-SET1</b>	4047438025362	Complete Kit IP Video Door Station • CamCore T25 with 6 Megapixel Moonlight Sensor, color (day) • Fisheye Lens B016 (focal length 1.6 mm, f/2.0, 180° x 180°) • <b>KeypadRFID</b> incl. one admin and six user cards • <b>Info Module</b> • MX-OPT-IO2 Ethernet board • IP65, -30 to 50°C (-22 to 122°F) • Triple frame set for in-wall or on-wall installation • USB stick, pen for plastic film, mounting material • <b>Color: White</b>
<b>MX-T25-SET1-s</b>	4047438025607	Complete Kit IP Video Door Station • CamCore T25 with 6 Megapixel Moonlight Sensor, color (day) • Fisheye Lens B016 (focal length 1.6 mm, f/2.0, 180° x 180°) • <b>KeypadRFID</b> incl. one admin and six user cards • <b>Info Module</b> • MX-OPT-IO2 Ethernet board • IP65, -30 to 50°C (-22 to 122°F) • Triple frame set for in-wall or on-wall installation • USB stick, pen for plastic film, mounting material • <b>Color: Silver</b>
<b>MX-T25-SET1-d</b>	4047438025522	Complete Kit IP Video Door Station • CamCore T25 with 6 Megapixel Moonlight Sensor, color (day) • Fisheye Lens B016 (focal length 1.6 mm, f/2.0, 180° x 180°) • <b>KeypadRFID</b> incl. one admin and six user cards • <b>Info Module</b> • MX-OPT-IO2 Ethernet board • IP65, -30 to 50°C (-22 to 122°F) • Triple frame set for in-wall or on-wall installation • USB stick, pen for plastic film, mounting material • <b>Color: Dark Gray</b>
<b>MX-T25-SET1-b</b>	4047438025447	Complete Kit IP Video Door Station • CamCore T25 with 6 Megapixel Moonlight Sensor, color (day) • Fisheye Lens B016 (focal length 1.6 mm, f/2.0, 180° x 180°) • <b>KeypadRFID</b> incl. one admin and six user cards • <b>Info Module</b> • MX-OPT-IO2 Ethernet board • IP65, -30 to 50°C (-22 to 122°F) • Triple frame set for in-wall or on-wall installation • USB stick, pen for plastic film, mounting material • <b>Color: Black</b>
<b>MX-T25-SET1-a</b>	4047438025683	Complete Kit IP Video Door Station • CamCore T25 with 6 Megapixel Moonlight Sensor, color (day) • Fisheye Lens B016 (focal length 1.6 mm, f/2.0, 180° x 180°) • <b>KeypadRFID</b> incl. one admin and six user cards • <b>Info Module</b> • MX-OPT-IO2 Ethernet board • IP65, -30 to 50°C (-22 to 122°F) • Triple frame set for in-wall or on-wall installation • USB stick, pen for plastic film, mounting material • <b>Color: Amber</b>



## Ordering Information T25 Set 2 – 6MP (Cam Core + Keypad + Info2wire + DoorMaster):

MX Order Number	EAN	Description
<b>MX-T25-SET2</b>	4047438025379	Complete Kit IP Video Door Station • CamCore T25 with 6 Megapixel Moonlight Sensor, color (day) • Fisheye Lens B016 (focal length 1.6 mm, f/2.0, 180° x 180°) • <b>KeypadRFID</b> incl. one admin and six user cards • <b>Info2wire+</b> (Info Module with indoor unit) • <b>MX-DoorMaster</b> (in-wall) with different frames • IP65, -30 to 50°C (-22 to 122°F) • Triple frame set for in-wall or on-wall installation • USB stick, pen for plastic film, mounting material • <b>Color: White</b>
<b>MX-T25-SET2-s</b>	4047438025614	Complete Kit IP Video Door Station • CamCore T25 with 6 Megapixel Moonlight Sensor, color (day) • Fisheye Lens B016 (focal length 1.6 mm, f/2.0, 180° x 180°) • <b>KeypadRFID</b> incl. one admin and six user cards • <b>Info2wire+</b> (Info Module with indoor unit) • <b>MX-DoorMaster</b> (in-wall) with different frames • IP65, -30 to 50°C (-22 to 122°F) • Triple frame set for in-wall or on-wall installation • USB stick, pen for plastic film, mounting material • <b>Color: Silver</b>
<b>MX-T25-SET2-d</b>	4047438025539	Complete Kit IP Video Door Station • CamCore T25 with 6 Megapixel Moonlight Sensor, color (day) • Fisheye Lens B016 (focal length 1.6 mm, f/2.0, 180° x 180°) • <b>KeypadRFID</b> incl. one admin and six user cards • <b>Info2wire+</b> (Info Module with indoor unit) • <b>MX-DoorMaster</b> (in-wall) with different frames • IP65, -30 to 50°C (-22 to 122°F) • Triple frame set for in-wall or on-wall installation • USB stick, pen for plastic film, mounting material • <b>Color: Dark Gray</b>
<b>MX-T25-SET2-b</b>	4047438025454	Complete Kit IP Video Door Station • CamCore T25 with 6 Megapixel Moonlight Sensor, color (day) • Fisheye Lens B016 (focal length 1.6 mm, f/2.0, 180° x 180°) • <b>KeypadRFID</b> incl. one admin and six user cards • <b>Info2wire+</b> (Info Module with indoor unit) • <b>MX-DoorMaster</b> (in-wall) with different frames • IP65, -30 to 50°C (-22 to 122°F) • Triple frame set for in-wall or on-wall installation • USB stick, pen for plastic film, mounting material • <b>Color: Black</b>
<b>MX-T25-SET2-a</b>	4047438025690	Complete Kit IP Video Door Station • CamCore T25 with 6 Megapixel Moonlight Sensor, color (day) • Fisheye Lens B016 (focal length 1.6 mm, f/2.0, 180° x 180°) • <b>KeypadRFID</b> incl. one admin and six user cards • <b>Info2wire+</b> (Info Module with indoor unit) • <b>MX-DoorMaster</b> (in-wall) with different frames • IP65, -30 to 50°C (-22 to 122°F) • Triple frame set for in-wall or on-wall installation • USB stick, pen for plastic film, mounting material • <b>Color: Amber</b>





### Ordering Information T25 Set 3 – 6MP (Cam Core + Keypad + Info Module + DoorMaster):

MX Order Number	EAN	Description
<b>MX-T25-SET3</b>	4047438025386	Complete Kit IP Video Door Station • CamCore T25 with 6 Megapixel Moonlight Sensor, color (day) • Fisheye Lens B016 (focal length 1.6 mm, f/2.0, 180° x 180°) • <b>KeypadRFID</b> incl. one admin and six user cards • <b>Info Module</b> • MX-OPT-IO2 Ethernet board • <b>MX-DoorMaster</b> (in-wall) with different frames • IP65, -30 to 50°C (-22 to 122°F) • Triple frame set for in-wall or on-wall installation • USB stick, pen for plastic film, mounting material • <b>Color: White</b>
<b>MX-T25-SET3-s</b>	4047438025621	Complete Kit IP Video Door Station • CamCore T25 with 6 Megapixel Moonlight Sensor, color (day) • Fisheye Lens B016 (focal length 1.6 mm, f/2.0, 180° x 180°) • <b>KeypadRFID</b> incl. one admin and six user cards • <b>Info Module</b> • MX-OPT-IO2 Ethernet board • <b>MX-DoorMaster</b> (in-wall) with different frames • IP65, -30 to 50°C (-22 to 122°F) • Triple frame set for in-wall or on-wall installation • USB stick, pen for plastic film, mounting material • <b>Color: Silver</b>
<b>MX-T25-SET3-d</b>	4047438025546	Complete Kit IP Video Door Station • CamCore T25 with 6 Megapixel Moonlight Sensor, color (day) • Fisheye Lens B016 (focal length 1.6 mm, f/2.0, 180° x 180°) • <b>KeypadRFID</b> incl. one admin and six user cards • <b>Info Module</b> • MX-OPT-IO2 Ethernet board • <b>MX-DoorMaster</b> (in-wall) with different frames • IP65, -30 to 50°C (-22 to 122°F) • Triple frame set for in-wall or on-wall installation • USB stick, pen for plastic film, mounting material • <b>Color: Dark Gray</b>
<b>MX-T25-SET3-b</b>	4047438025461	Complete Kit IP Video Door Station • CamCore T25 with 6 Megapixel Moonlight Sensor, color (day) • Fisheye Lens B016 (focal length 1.6 mm, f/2.0, 180° x 180°) • <b>KeypadRFID</b> incl. one admin and six user cards • <b>Info Module</b> • MX-OPT-IO2 Ethernet board • <b>MX-DoorMaster</b> (in-wall) with different frames • IP65, -30 to 50°C (-22 to 122°F) • Triple frame set for in-wall or on-wall installation • USB stick, pen for plastic film, mounting material • <b>Color: Black</b>
<b>MX-T25-SET3-a</b>	4047438025706	Complete Kit IP Video Door Station • CamCore T25 with 6 Megapixel Moonlight Sensor, color (day) • Fisheye Lens B016 (focal length 1.6 mm, f/2.0, 180° x 180°) • <b>KeypadRFID</b> incl. one admin and six user cards • <b>Info Module</b> • MX-OPT-IO2 Ethernet board • <b>MX-DoorMaster</b> (in-wall) with different frames • IP65, -30 to 50°C (-22 to 122°F) • Triple frame set for in-wall or on-wall installation • USB stick, pen for plastic film, mounting material • <b>Color: Amber</b>